

[www.acteongroup.com](http://www.acteongroup.com)

Document non contractuel - Réf. 707041 1 - 01/2018 - Copyright © 2018 ACTEON. All rights reserved. No information or part of this document may be reproduced or transmitted in any form whatsoever without the prior consent of ACTEON.

ACTEON

## INNOVATIVE IMAGING

Digital medical imaging has significantly contributed to the improvement of diagnoses and the widespread use of less invasive procedures. Over the past 15 years, ACTEON has committed to channeling its efforts into contributing to improve the accuracy of surgical procedures, and to reduce the radiation doses emitted. Through the development of ever more sophisticated yet intuitive 2.0 software packages, our R&D teams are able to innovate on a daily basis. In our permanent pursuit of excellence, we are proud today to present our latest innovations in this brochure.

For more information, please contact:  
SOPRO S.A. | A company of ACTEON Group  
ZAC Athélia IV | Avenue des Genévriers | 13705 LA CIOTAT cedex | FRANCE  
Tél + 33 (0) 442 98 01 01 | Fax + 33 (0) 442 71 76 90  
E-mail : [info@sopro.acteongroup.com](mailto:info@sopro.acteongroup.com) | [www.acteongroup.com](http://www.acteongroup.com)



# TECHNICAL SPECIFICATIONS

## Size 1

External dimensions ..... 25 x 39mm  
 Active surface area ..... 600mm<sup>2</sup> (20 x 30mm)  
 Number of pixels ..... 1.50million

## SOPIX / SOPIX inside system

Technology ..... CMOS + scintillator+ optic fibre  
 Pixel size ..... 20µm x 20µm  
 Theoretical resolution ..... 25lp/mm  
 Real resolution ..... >12lp/mm  
 Supplied imaging software ..... Sopro Imaging  
 TWAIN module ..... Yes

## SOPIX / SOPIX<sup>2</sup> USB connection

Connection ..... USB 2.0  
 Total cable length ..... 3.70m

## Windows® minimum configuration required

Operating system ..... Windows 7 SP1  
 Processor ..... Core 2 duo - 3GHz  
 RAM ..... 2GB  
 Hard disk ..... 250GB  
 USB ports ..... 4 USB2 Hi-Speed ports  
 Graphic card ..... 512 MB RAM unshared memory  
 ..... compatible DirectX 9  
 USB Chipset ..... Intel or NEC / RENESAS  
 Screen resolution ..... 1280 x 1024

## Mac® minimum configuration required

Computer ..... MacBook® Pro 13.3" or iMac® 21.5"  
 Operating system ..... OS X Mavericks  
 Processor ..... Intel® Core 2 Duo  
 RAM ..... 2GB

For Yosemite and El Capitan operating systems, a Mac computer from 2013 or later is required.

## Size 2

External dimensions ..... 31 x 42mm  
 Active surface area ..... 884mm<sup>2</sup> (26 x 34mm)  
 Number of pixels ..... 2.21 millions

## SOPIX<sup>2</sup> / SOPIX<sup>2</sup> inside system

Technology ..... CMOS + scintillator + optic fibre  
 Pixel size ..... 20µm x 20µm  
 Theoretical resolution ..... 25lp/mm  
 Real resolution ..... >18lp/mm  
 Supplied imaging software ..... Sopro Imaging  
 TWAIN module ..... Yes

## SOPIX inside / SOPIX<sup>2</sup> inside USB connection

Connection ..... USB 2.0  
 Sensor cable length ..... 0.70m

## Windows® recommended configuration

Operating system ..... Windows 10  
 Processor ..... Intel Core i5  
 RAM ..... 4GB  
 Hard disk ..... 1TB  
 USB ports ..... 4 USB2 Hi-Speed ports  
 Graphic card ..... Chipset Nvidia® or ATI® 2GB  
 ..... unshared memory compatible DirectX 9 or more  
 USB Chipset ..... Intel or NEC / RENESAS  
 Screen resolution ..... 1280 x 1024 or more


## Mac® recommended configuration

Computer ..... iMac 27"  
 Operating system ..... Mac OS X El Capitan  
 Processor ..... Intel Core i7  
 RAM ..... 4GB

**Note:** In the case of SOPIX inside and SOPIX<sup>2</sup> inside, the IEC 60601-2-65 norm requires for each X-Ray intraoral system with an onboard digital sensor to use a square collimator.  
 Note: The data transfer from the intraoral system X-Mind unity to Sopro Imaging is not available on Sopro Imaging Mac version yet.

The medical devices for dental care SOPIX Series are of class IIa and manufactured by SOPRO, notified body LNE/GMED, X-Mind unity is of class IIb and manufactured by DE GOTZEN, notified body DNV - CE 0434. These medical devices are not refunded by health insurance organizations. Read carefully the instructions on the labelling before use.

SOPIX®, X-Mind®, FIBER2PIXEL® and SOPRO® are registered trademarks of SOPRO.  
 X-Mind® is registered trademarks of DE GÖTZEN.  
 "All other trademarks cited herein are the property of their respective owners"

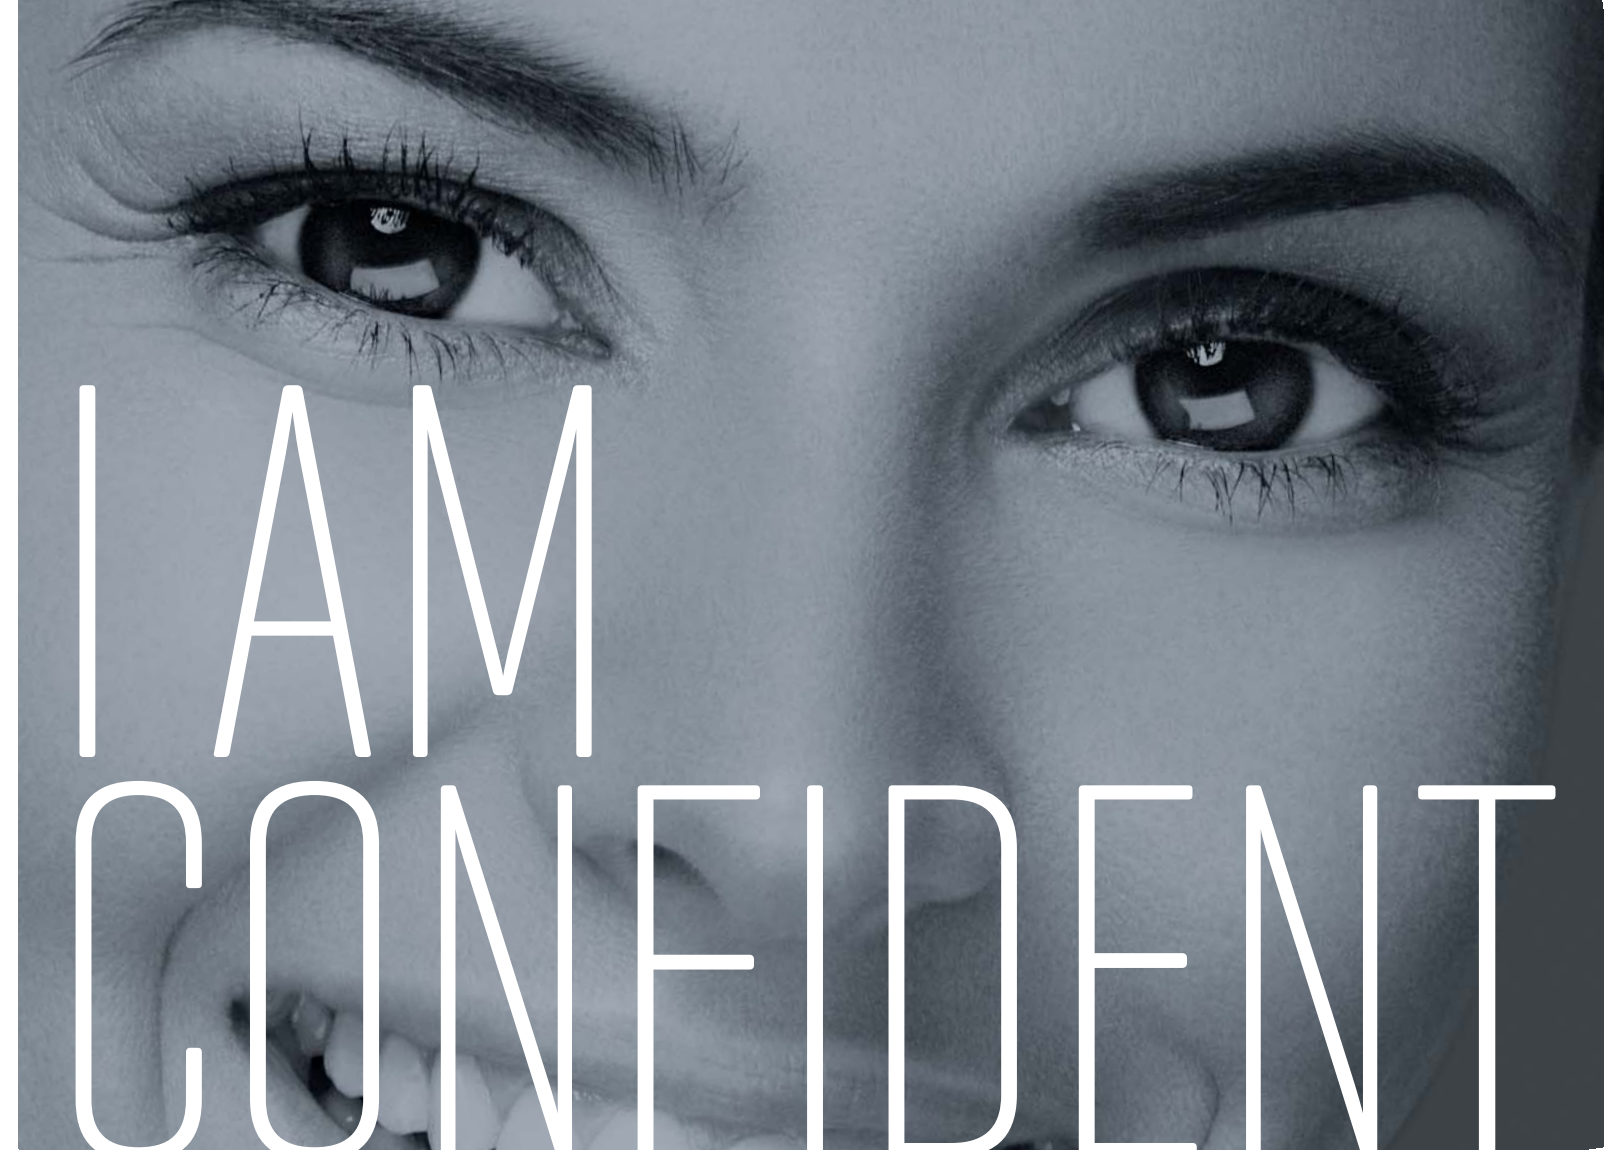


## SOPIX SERIES

**A successful X-ray every time with minimal exposure to radiation**



# STRIKING CONTRAST FOR A MORE RELIABLE DIAGNOSIS

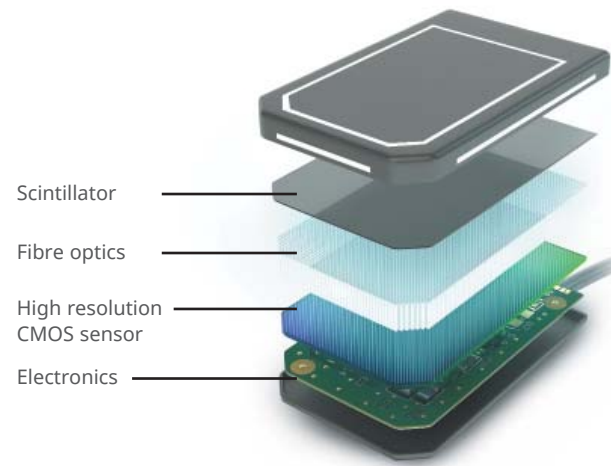



## MORE INVENTIVE Better differentiation of the dental tissue

SOPIX® sensors surpass the limits of radiological examinations by offering **greater differentiation of dental tissue.**

This technological achievement is called **FIBER2PIXEL®.**

WITH FIBRE - FIBER2PIXEL®

WITHOUT FIBRE

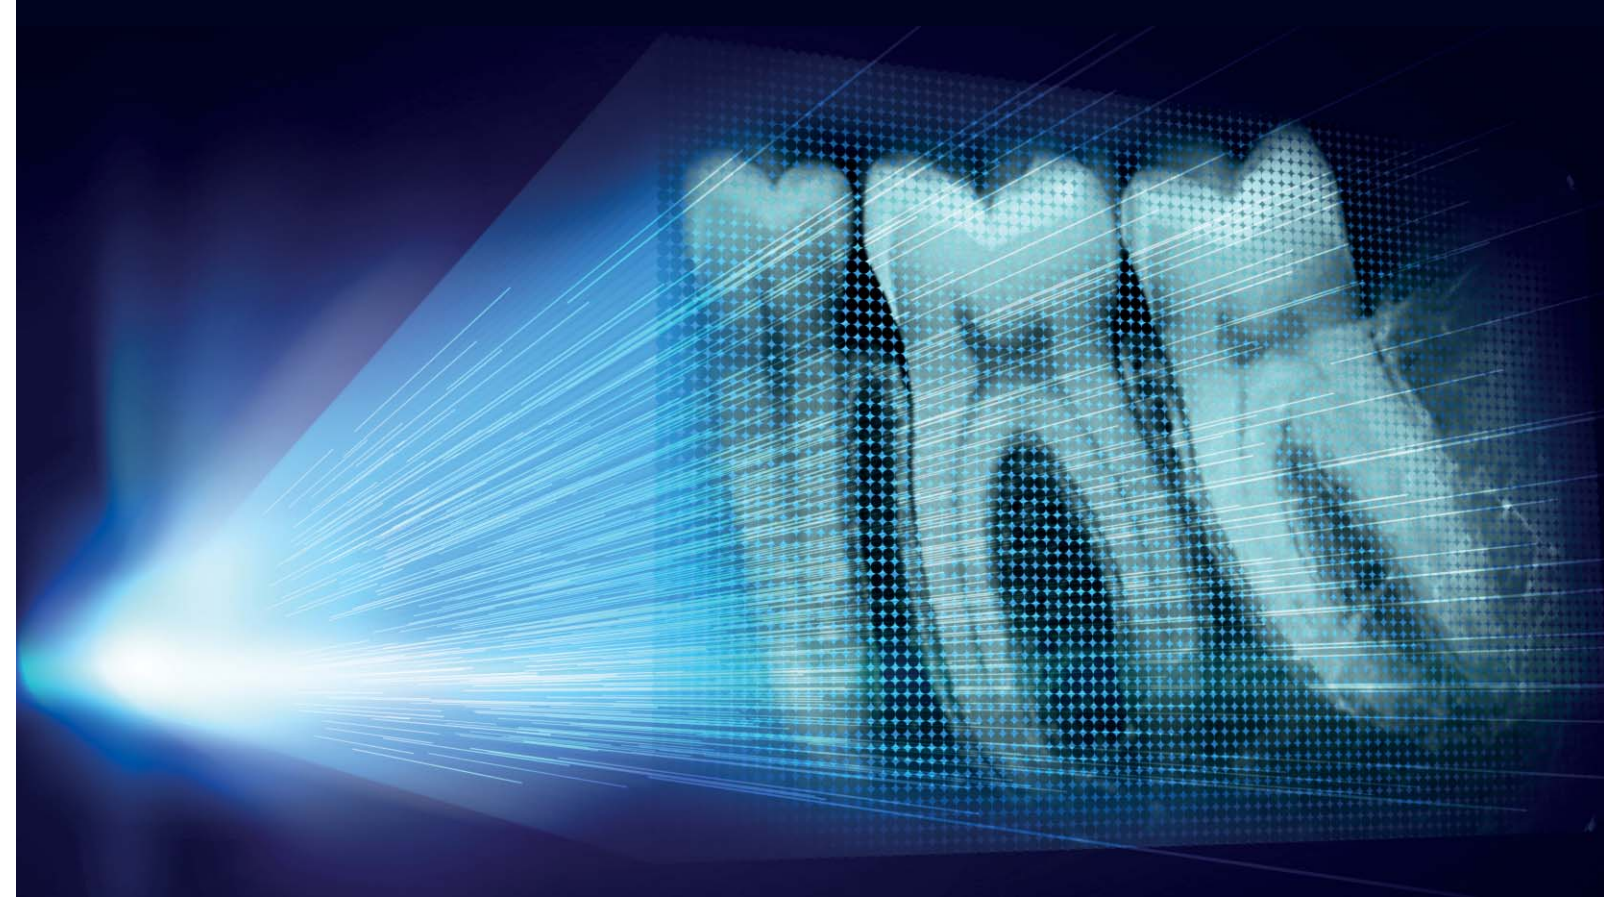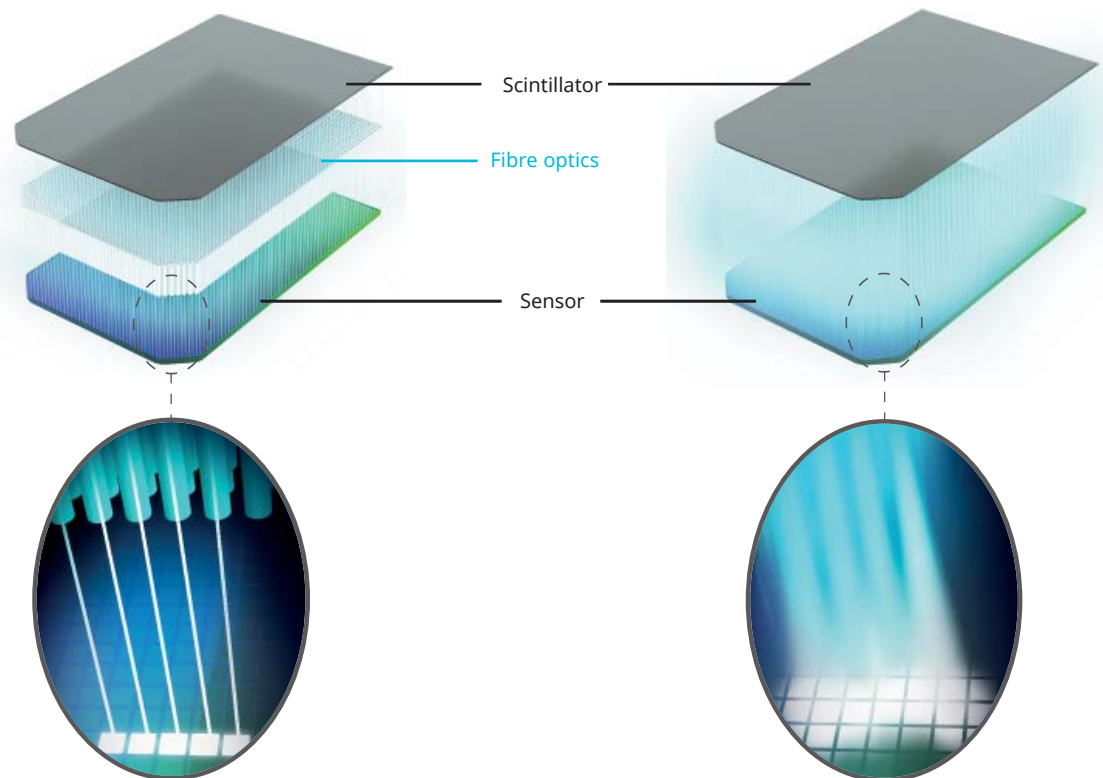

# 2 FIBER PIXEL

## Differentiation of the dental tissue

**FIBER2PIXEL®** technology is based on the use of **broad spectrum optical microfibres** for the guided transmission of photon emissions in order to provide **highly contrasted images.**

## LESS INVASIVE

### A more reliable diagnosis

The different tooth anatomic structures, such as the bone, roots, pulp... are highlighted with **extreme precision** on the image.

Your diagnosis is **faster** and **more accurate!**



# THE PERFECT FIT TO YOUR CLINICAL APPLICATIONS

Endodontics



Pedodontics



Cariology




Periodontics



Periapical



Bitewing

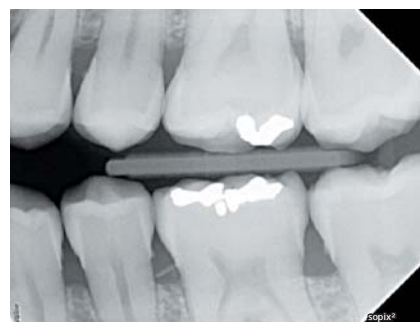

Implantology



## HIGH-QUALITY IMAGES

With **FIBER2PIXEL**® technology, SOPIX® sensors provide **accurate images** and **striking contrast** to ensure a **reliable diagnosis**.

## DESIGNED FOR YOUR PRACTICE

**Two sizes** are available depending on **patient morphology** and **clinical applications**.


Scale 1



Size 2



Size 1

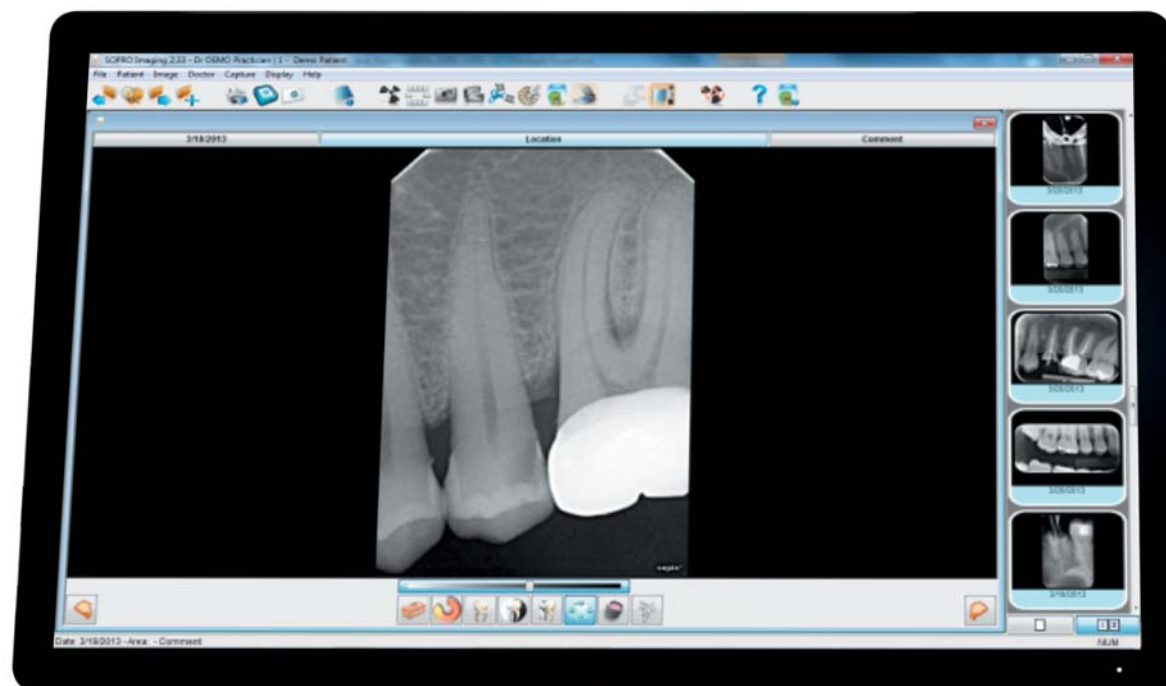

## SOPRO IMAGING, A POWERFUL IMAGING SOFTWARE

Extremely user-friendly, SOPRO® Imaging software offers **advanced X-ray image processing tools**.

SOPRO Imaging is delivered with each SOPIX and is compatible Windows® and Mac®.


# A QUALITY IMAGE EVERYTIME WITH MINIMAL EXPOSURE TO RADIATION

## CUTTING EDGE TECHNOLOGY

Available in all SOPIX® series sensors, patented **Ace** technology (Automatic control exposure) analyses in real-time, the amount of X-rays accumulated by the sensor. It automatically freezes the image acquisition as soon as the sensor receives the radiation required to produce the perfect image.

### Eliminate the risk of over exposing the image!

Combined with the X-Mind® unity intraoral X-ray generator, SOPIX inside with ACE technology **limits the emission of x-rays** during the acquisition to the necessary amount for the patient's morphology. It uses the **minimum dose** required to provide a high-quality image.

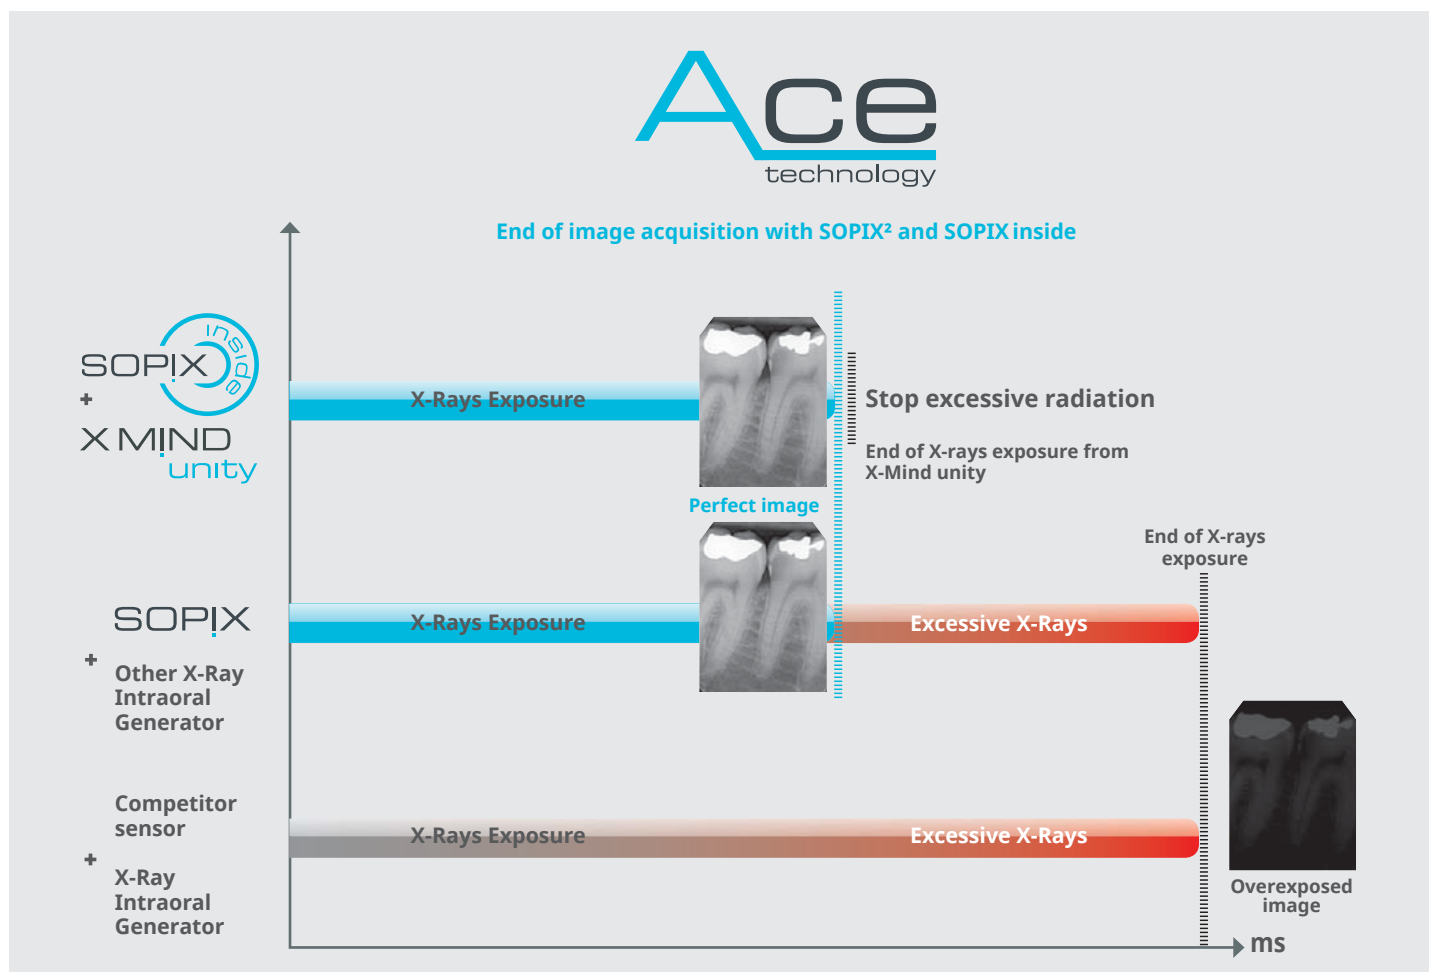

*"ACE is the combination of advanced sensor technology, digital power electronics and the know-how of two diagnostic imaging divisions. The synergy between La Ciotat (FRANCE) and Milan (ITALY) R&D teams gave birth to an innovative concept focused on patients, with outstanding image quality."*



## FOR A SAFER PROCESS

With SOPIX Series sensors and its patented ACE technology, you acquire **successful X-rays every time**, meaning reliable and accurate diagnosis. You **save time** avoiding the need for retakes.

Whilst using X-Mind unity intraoral X-ray generator with SOPIX inside, the patients **receive the minimum required dose for their dental morphology**. You protect your patients and your staff from unnecessary radiation.

# PATIENT AND STAFF

# OPTIMAL PROTECTION



# STOP EXCESSIVE RADIATION

The communication between the X-Mind unity and SOPIX inside sensor provides **unique benefits**.

When SOPIX inside has received enough energy to provide an **exceptional image quality**, it tells the X-Mind unity to **stop the X-ray emission**.

## LOW DOSE



### Effective protection for minimal exposure


The patient only receives the necessary dose adapted for their dental morphology, which **protects them from unnecessary exposure**.

### SOPRO Imaging, always one step ahead

SOPRO Imaging systematically records the **X-Mind unity settings** as well as the **effective dose received by the patient** for each acquisition.

This ensures **permanent traceability** for every patient.

# EXCLUSIVE TRACEABILITY

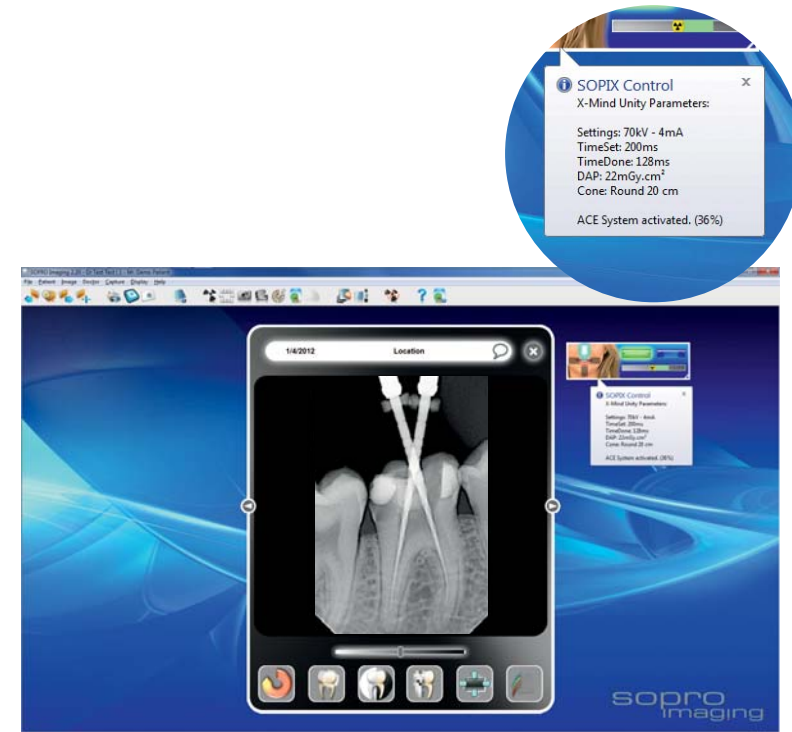

### Outstanding working comfort

Through direct integration of SOPIX inside into X-Mind unity, **connecting cables are hidden** inside the X-ray unit.

The holder places the sensor **safely at easy reach** to prevent it from falling onto the floor.

Your working environment is therefore **more ergonomic and productive**.



# OUTSTANDING PERFORMANCE

## SMART DESIGN FOR BETTER COMFORT

**White side stripes** ensure high visibility of the sensor in the dark area of the mouth, to correctly position the X-ray tube perpendicular to the sensor.



**Rounded edges and corners** for improved **patient comfort**.

## FAST AND EASY TO USE

Save time with a sensor that is **always ready to acquire**.  
The image is **displayed immediately**.

## NO MORE OVEREXPOSED IMAGES

Available on all SOPIX series sensors,  
ACE technology freezes the image during acquisition to protect it from over-exposure.

**Acquire perfect image the first time and every time!**



## THE SOPIX SERIES

### SOPIX

With proven quality and reliability, SOPIX produces a high quality image at an affordable price.

The most economic solution of the SOPIX series



### SOPIX<sup>2</sup>

This sensor provides an exceptional image quality, using the most advanced technology.

The solution for optimal performance



This sensor is directly integrated into the X-Mind unity intraoral X-ray generator, resulting in a reduction of X-ray emissions.

The patient's well being is the highest priority

